

TA102-10 DB25 M/F Cable

**1.8 m cable with one DB25 male and
one DB25 female connector**

Version 1.0

User Manual

Issue 1.1

September 2006

TEWS TECHNOLOGIES GmbH

Am Bahnhof 7
25469 Halstenbek, Germany
www.tews.com

Phone: +49-(0)4101-4058-0
Fax: +49-(0)4101-4058-19
e-mail: info@tews.com

TEWS TECHNOLOGIES LLC

9190 Double Diamond Parkway,
Suite 127, Reno, NV 89521, USA
www.tews.com

Phone: +1 (775) 850 5830
Fax: +1 (775) 201 0347
e-mail: usasales@tews.com

TA102-10 DB25 M/F Cable

1.8 m cable with one DB25 male and one DB25 female connector

This document contains information, which is proprietary to TEWS TECHNOLOGIES GmbH. Any reproduction without written permission is forbidden.

TEWS TECHNOLOGIES GmbH has made any effort to ensure that this manual is accurate and complete. However TEWS TECHNOLOGIES GmbH reserves the right to change the product described in this document at any time without notice.

TEWS TECHNOLOGIES GmbH is not liable for any damage arising out of the application or use of the device described herein.

Style Conventions

Hexadecimal characters are specified with prefix 0x, i.e. 0x029E (that means hexadecimal value 029E).

For signals on hardware products, an 'Active Low' is represented by the signal name with # following, i.e. IP_RESET#.

©2005-2006 by TEWS TECHNOLOGIES GmbH

IndustryPack is a registered trademark of SBS Technologies, Inc

Issue	Description	Date
1.0	First Issue	April 2005
1.1	New address TEWS LLC	September 2006

Table of Contents

1	PRODUCT DESCRIPTION.....	5
2	DB25 M/F CABLE PIN ASSIGNMENT.....	6
3	ASSEMBLY DRAWING.....	7

Table of Figures

FIGURE 2-1 :	DB25 M/F CABLE PIN ASSIGNMENT.....	6
FIGURE 3-1 :	ASSEMBLY DRAWING.....	7

1 Product Description

The TA102-10 represents a one to one connection. At one side of the shielded cable a DB25 male connector is mounted and on the other side a DB25 female connectors is mounted. All 25 pins are connected. It provides a direct connection between or to a lot of TEWS products (for example TPMC551, TPMC860, TPMC861, TPMC/TIP866-TM-10 and more).

Length of the TA102-10 DB25 M/F Cable is at least 1.8 m.

2 DB25 M/F Cable Pin Assignment

X1 DB25 male	X2 DB25 female
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25

Figure 2-1 : DB25 M/F Cable Pin Assignment

3 Assembly Drawing

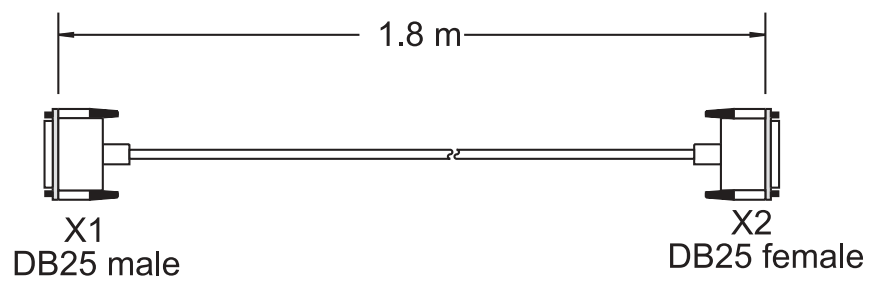
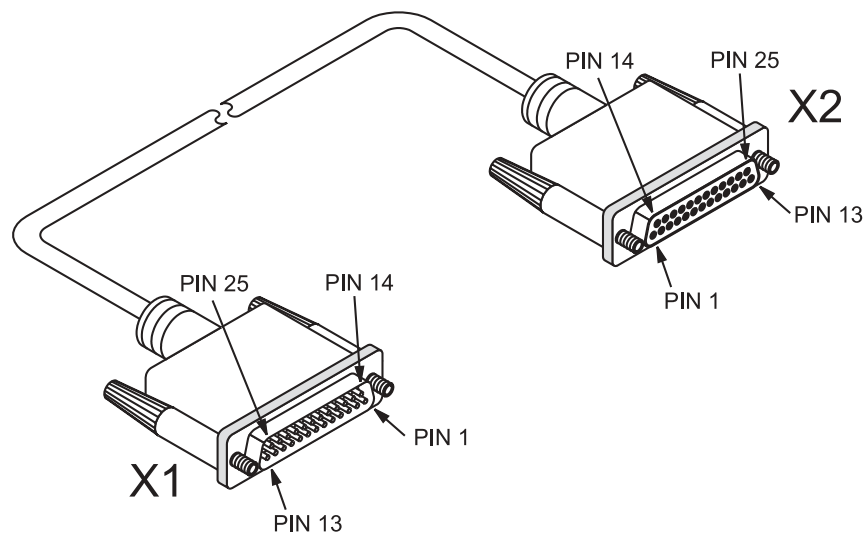


Figure 3-1 : Assembly Drawing