
TA103-10 DB25 M/M Cable

1.8 m cable with two DB25 male connectors

Version 1.0

User Manual

Issue 1.1

September 2006

TEWS TECHNOLOGIES GmbH

Am Bahnhof 7
25469 Halstenbek, Germany
www.tews.com

Phone: +49-(0)4101-4058-0
Fax: +49-(0)4101-4058-19
e-mail: info@tews.com

TEWS TECHNOLOGIES LLC

9190 Double Diamond Parkway,
Suite 127, Reno, NV 89521, USA
www.tews.com

Phone: +1 (775) 850 5830
Fax: +1 (775) 201 0347
e-mail: usasales@tews.com

TA103-10 DB25 M/M Cable

1.8 m cable with two DB25 male connectors

This document contains information, which is proprietary to TEWS TECHNOLOGIES GmbH. Any reproduction without written permission is forbidden.

TEWS TECHNOLOGIES GmbH has made any effort to ensure that this manual is accurate and complete. However TEWS TECHNOLOGIES GmbH reserves the right to change the product described in this document at any time without notice.

TEWS TECHNOLOGIES GmbH is not liable for any damage arising out of the application or use of the device described herein.

Style Conventions

Hexadecimal characters are specified with prefix 0x, i.e. 0x029E (that means hexadecimal value 029E).

For signals on hardware products, an 'Active Low' is represented by the signal name with # following, i.e. IP_RESET#.

©2005-2006 by TEWS TECHNOLOGIES GmbH

IndustryPack is a registered trademark of SBS Technologies, Inc

| Issue | Description | Date |
|--------------|----------------------|----------------|
| 1.0 | First Issue | April 2005 |
| 1.1 | New address TEWS LLC | September 2006 |

Table of Contents

| | | |
|---|------------------------------------|---|
| 1 | PRODUCT DESCRIPTION..... | 5 |
| 2 | DB25 M/M CABLE PIN ASSIGNMENT..... | 6 |
| 3 | ASSEMBLY DRAWING..... | 7 |

Table of Figures

| | | |
|--------------|------------------------------------|---|
| FIGURE 2-1 : | DB25 M/M CABLE PIN ASSIGNMENT..... | 6 |
| FIGURE 3-1 : | ASSEMBLY DRAWING..... | 7 |

1 Product Description

The TA103-10 represents a standard DB25 one to one connection. At both sides of the cable DB25 male connectors are mounted which provide a direct connection to a lot of module of TEWS product range (for example TPMC550, TPMC551, TPMC860, TPMC917 and more).

The TA103-10 DB25 M/M Cable in conjunction with a TA202-10 Terminal Block could be used for prototyping and also for series of modules with DB25 female connector.

Length of the TA103-10 DB25 M/M Cable is at least 1.8 m.

2 DB25 M/M Cable Pin Assignment

| X1 DB25 male | X2 DB25 male |
|-------------------------|-------------------------|
| 1 | 1 |
| 2 | 2 |
| 3 | 3 |
| 4 | 4 |
| 5 | 5 |
| 6 | 6 |
| 7 | 7 |
| 8 | 8 |
| 9 | 9 |
| 10 | 10 |
| 11 | 11 |
| 12 | 12 |
| 13 | 13 |
| 14 | 14 |
| 15 | 15 |
| 16 | 16 |
| 17 | 17 |
| 18 | 18 |
| 19 | 19 |
| 20 | 20 |
| 21 | 21 |
| 22 | 22 |
| 23 | 23 |
| 24 | 24 |
| 25 | 25 |

Figure 2-1 : DB25 M/M Cable Pin Assignment

3 Assembly Drawing

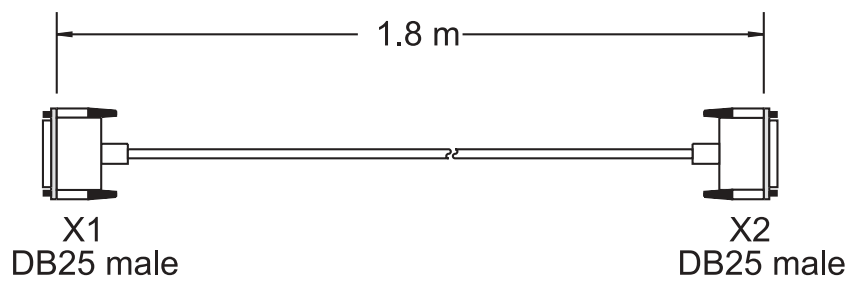
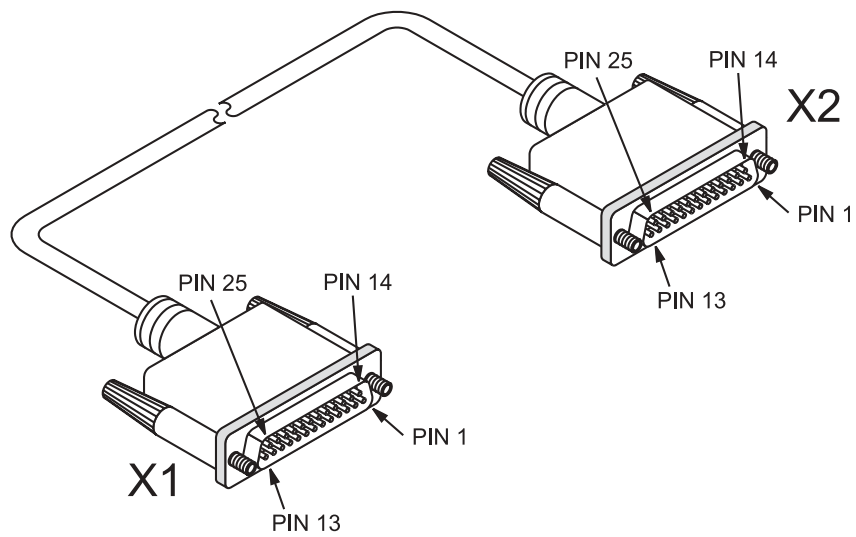


Figure 3-1 : Assembly Drawing