

---

# TPIM003

## PIM I/O Module

Version 1.0

## User Manual

Issue 1.1

September 2006

D78003800

---

**TEWS TECHNOLOGIES GmbH**

Am Bahnhof 7  
25469 Halstenbek, Germany  
[www.tews.com](http://www.tews.com)

Phone: +49-(0)4101-4058-0  
Fax: +49-(0)4101-4058-19  
e-mail: [info@tews.com](mailto:info@tews.com)

**TEWS TECHNOLOGIES LLC**

9190 Double Diamond Parkway,  
Suite 127, Reno, NV 89521, USA  
[www.tews.com](http://www.tews.com)

Phone: +1 (775) 850 5830  
Fax: +1 (775) 201 0347  
e-mail: [usasales@tews.com](mailto:usasales@tews.com)

**TPIM003-10**

PIM I/O Module with 68 pin SCSI-3 type connector for e.g. TPMC460, TPMC630 and TPMC868

This document contains information, which is proprietary to TEWS TECHNOLOGIES GmbH. Any reproduction without written permission is forbidden.

TEWS TECHNOLOGIES GmbH has made any effort to ensure that this manual is accurate and complete. However TEWS TECHNOLOGIES GmbH reserves the right to change the product described in this document at any time without notice.

TEWS TECHNOLOGIES GmbH is not liable for any damage arising out of the application or use of the device described herein.

**Style Conventions**

Hexadecimal characters are specified with prefix 0x, i.e. 0x029E (that means hexadecimal value 029E).

For signals on hardware products, an 'Active Low' is represented by the signal name with # following, i.e. RESET#.

©2005-2006 by TEWS TECHNOLOGIES GmbH

---

<b>Issue</b>	<b>Description</b>	<b>Date</b>
1.0	First Issue	May 2005
1.1	New address TEWS LLC	September 2006

---

## Table of Contents

1	PRODUCT DESCRIPTION.....	6
2	TECHNICAL SPECIFICATION.....	7
3	CONNECTOR P10.....	8
4	CONNECTOR P14.....	9
5	CONNECTOR X1.....	10
6	PIN ASSIGNMENT .....	11

---

## Table of Figures

FIGURE 1-1 : BLOCK DIAGRAM.....	6
FIGURE 2-1 : TECHNICAL SPECIFICATION.....	7
FIGURE 3-1 : CONNECTOR P10.....	8
FIGURE 4-1 : CONNECTOR P14.....	9
FIGURE 5-1 : CONNECTOR X1.....	10
FIGURE 6-1 : PIN ASSIGNMENT.....	11

# 1 Product Description

The TPIM003 is a standard single-width PIM I/O module to be used with any PIM Carrier like TEWS' TCP020-TM-10, TVME020-TM-10 or others. It offers easy access to the PMC back I/O lines of PMC carriers with back I/O like TEWS' TCP260 or TVME8400.

The TPIM003 distributes all 64 PMC back I/O lines to a 68 pin SCSI-3 type connector located in the EMI front panel. Additional GND pins are inserted by solder jumpers at pin 9, 26, 43 and 60 of the 68 pin SCSI-3 type connector. The routing and I/O signal mapping of the TPIM003-10 is optimized for differential pair routing.

The TPIM003-10 recreates the PMC front I/O signal mapping in its 68 pin SCSI-3 type connector when used with e.g. the TPMC460, TPMC630 or TPMC868. Refer to the TPMC Data Sheets to find out if the TPIM003-10 recreates the PMC front I/O signal mapping in its 68 pin SCSI-3 type connector.

The operating temperature is -40°C to +85°C.

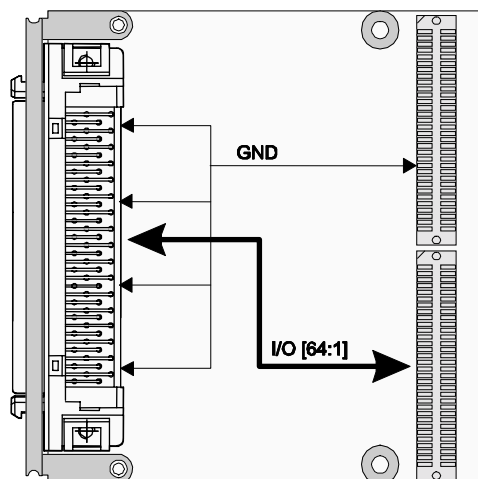


Figure 1-1 : Block Diagram

**The TPIM003-10 recreates the PMC front I/O signal mapping in its 68 pin SCSI-3 type connector when used with e.g. the TPMC460, TPMC630 or TPMC868.**

**Always refer to the TPMC Data Sheets to find out the pin assignment of the TPIM003-10 68 pin SCSI-3 type connector.**

## **2 Technical Specification**

<b>Front panel</b>	EMI front panel
<b>Number of PMC I/O Lines supported</b>	64
<b>Operating Data</b>	
<b>Temperature Range</b>	Operating: -40°C to +85°C Storage: -40°C to +100°C
<b>MTBF</b>	1435000 h
<b>Weight</b>	47 g
<b>Board Size</b>	69 mm x 74 mm
<b>Humidity</b>	5 – 95% non condensing

Figure 2-1 : Technical Specification

### 3 Connector P10

P10 Pin	Signal Name	Signal Name	P10 Pin
1	-	-	2
3	-	-	4
5	-	-	6
7	-	-	8
9	-	-	10
11	-	-	12
13	GND	-	14
15	-	-	16
17	-	GND	18
19	-	-	20
21	-	-	22
23	-	-	24
25	-	-	26
27	-	-	28
29	GND	-	30
31	-	-	32
33	-	GND	34
35	-	-	36
37	-	-	38
39	-	-	40
41	-	-	42
43	-	-	44
45	GND	-	46
47	-	-	48
49	-	GND	50
51	-	-	52
53	-	-	54
55	-	-	56
57	-	-	58
59	-	-	60
61	-	-	62
63	-	-	64

Figure 3-1 : Connector P10



## 4 Connector P14

P14 Pin	Signal Name	Signal Name	P14 Pin
1	PMC I/O 1	PMC I/O 2	2
3	PMC I/O 3	PMC I/O 4	4
5	PMC I/O 5	PMC I/O 6	6
7	PMC I/O 7	PMC I/O 8	8
9	PMC I/O 9	PMC I/O 10	10
11	PMC I/O 11	PMC I/O 12	12
13	PMC I/O 13	PMC I/O 14	14
15	PMC I/O 15	PMC I/O 16	16
17	PMC I/O 17	PMC I/O 18	18
19	PMC I/O 19	PMC I/O 20	20
21	PMC I/O 21	PMC I/O 22	22
23	PMC I/O 23	PMC I/O 24	24
25	PMC I/O 25	PMC I/O 26	26
27	PMC I/O 27	PMC I/O 28	28
29	PMC I/O 29	PMC I/O 30	30
31	PMC I/O 31	PMC I/O 32	32
33	PMC I/O 33	PMC I/O 34	34
35	PMC I/O 35	PMC I/O 36	36
37	PMC I/O 37	PMC I/O 38	38
39	PMC I/O 39	PMC I/O 40	40
41	PMC I/O 41	PMC I/O 42	42
43	PMC I/O 43	PMC I/O 44	44
45	PMC I/O 45	PMC I/O 46	46
47	PMC I/O 47	PMC I/O 48	48
49	PMC I/O 49	PMC I/O 50	50
51	PMC I/O 51	PMC I/O 52	52
53	PMC I/O 53	PMC I/O 54	54
55	PMC I/O 55	PMC I/O 56	56
57	PMC I/O 57	PMC I/O 58	58
59	PMC I/O 59	PMC I/O 60	60
61	PMC I/O 61	PMC I/O 62	62
63	PMC I/O 63	PMC I/O 64	64

Figure 4-1 : Connector P14

## 5 Connector X1

X1 Pin	Signal Name	Signal Name	X1 Pin
1	PMC I/O 1	PMC I/O 3	2
3	PMC I/O 5	PMC I/O 7	4
5	PMC I/O 9	PMC I/O 11	6
7	PMC I/O 13	PMC I/O 15	8
9	GND*)	PMC I/O 17	10
11	PMC I/O 19	PMC I/O 21	12
13	PMC I/O 23	PMC I/O 25	14
15	PMC I/O 27	PMC I/O 29	16
17	PMC I/O 31	PMC I/O 33	18
19	PMC I/O 35	PMC I/O 37	20
21	PMC I/O 39	PMC I/O 41	22
23	PMC I/O 43	PMC I/O 45	24
25	PMC I/O 47	GND*)	26
27	PMC I/O 49	PMC I/O 51	28
29	PMC I/O 53	PMC I/O 55	30
31	PMC I/O 57	PMC I/O 59	32
33	PMC I/O 61	PMC I/O 63	34
35	PMC I/O 2	PMC I/O 4	36
37	PMC I/O 6	PMC I/O 8	38
39	PMC I/O 10	PMC I/O 12	40
41	PMC I/O 14	PMC I/O 16	42
43	GND*)	PMC I/O 18	44
45	PMC I/O 20	PMC I/O 22	46
47	PMC I/O 24	PMC I/O 26	48
49	PMC I/O 28	PMC I/O 30	50
51	PMC I/O 32	PMC I/O 34	52
53	PMC I/O 36	PMC I/O 38	54
55	PMC I/O 40	PMC I/O 42	56
57	PMC I/O 44	PMC I/O 46	58
59	PMC I/O 48	GND*)	60
61	PMC I/O 50	PMC I/O 52	62
63	PMC I/O 54	PMC I/O 56	64
65	PMC I/O 58	PMC I/O 60	66
67	PMC I/O 62	PMC I/O 64	68

Figure 5-1 : Connector X1

\*) Each of these Pins can separately be connected to GND by a 0 Ohm resistor or solder jumper to achieve extended grounding of the I/O signals. The TPIM003-10 connects these pins to GND by default.

# 6 Pin Assignment

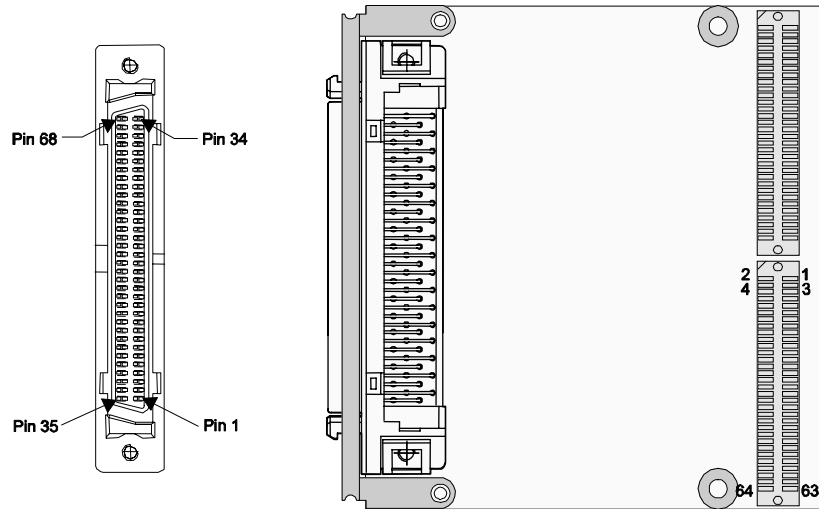


Figure 6-1 : Pin Assignment