

TCP002-TM Transition Module for 6U cPCI IP Carrier


Application Information

The TCP002-TM is a 6U Transition Module to be used with 6U cPCI IP carrier, providing easy access to the IP I/O lines of cPCI IP carrier with back I/O.

It distributes all 200 IP I/O lines from the cPCI RJ4 and RJ5 connector to four 50 pin SCSI-2 type connectors located in the EMI front panel.


The routing between the cPCI RJ4 and RJ5 connector and the four SCSI-2 type connectors in the EMI front panel is PCIMG 2.4 R1.0 compliant.

The operating temperature range is -40°C to +85°C.

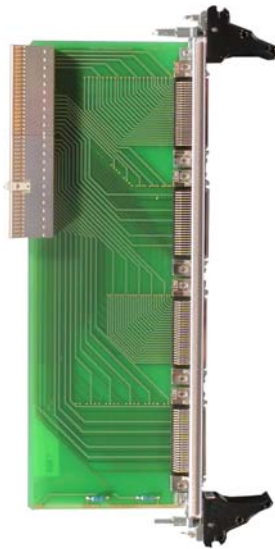

Technical Information

- Form Factor: cPCI 6U Rear Transition Module (233mm x 80mm)
- I/O Routing:
 - PCIMG 2.4 R1.0 compliant I/O mapping (RJ4 and RJ5)
 - I/O lines are accessible via four HD50 SCSI-2 type connectors
- EMI front panel
- Operating temperature: -40°C to +85°C

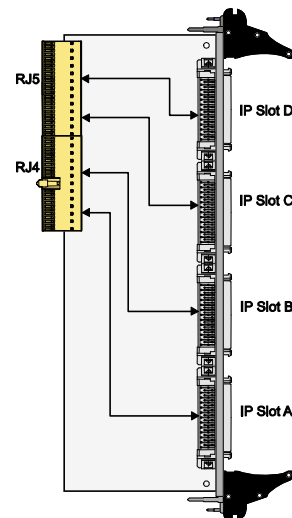

Order Information

- | | |
|----------------------|---|
| TCP002-TM-10R | Transition Module for 6U cPCI IP carrier, IP I/O lines accessible via four HD50 SCSI-2 type connectors mounted in EMI front panel |
| TCP002-TM-10 | None RoHS compliant version of TCP002-TM-10R |
| TCP002-TM-DOC | User Manual |