

TCP040-TM PIM Carrier Transition Module for 3U cPCI

Application Information

The TCP040-TM is a 3U PIM Carrier Transition Module to be used with 3U CompactPCI PMC carrier like TEWS' TCP270 or 3U CompactPCI modules with back I/O. It provides easy access to the PMC I/O lines of 3HE CompactPCI PMC carriers and most TEWS CompactPCI Modules with back I/O.




It distributes all I/O lines of one PMC from the cPCI RJ2 connector to a PIM module.

The operating temperature range is -40°C to +85°C.

Technical Information

- Form Factor: cPCI 3U Rear Transition Module (100 mm x 80 mm)
- I/O Routing:
 - PMC I/O mapping via RJ2
 - I/O lines are accessible via the PIM modules
- EMI front panel
- Operating temperature: -40°C to +85°C

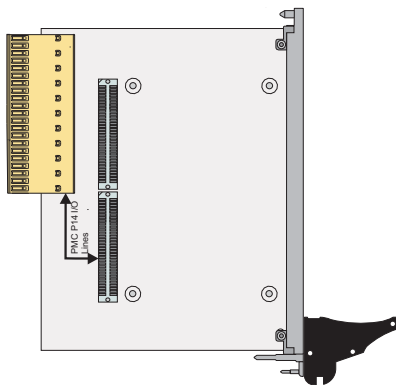

Order Information

RoHS Compliant

TCP040-TM-10R PIM Carrier Transition Module for 3U cPCI PMC Carrier with back I/O via J2

None RoHS Compliant

TCP040-TM-10 None RoHS compliant version of TCP040-TM-10R

Documentation

TCP040-TM-DOC User Manual

Related Products

- TPIM001** PIM I/O Module with HD50 SCSI-2 type connector
- TPIM002** PIM I/O Module with HD68 SCSI-3 type connector
- TPIM003** PIM I/O Module with HD68 SCSI-3 type connector
- TPIM004** PIM I/O Module with 4 RJ45 connectors
- TPIM005** PIM I/O Module with HD68 SCSI-3 type connector