

TPIM002 PIM I/O Module with 68 pin Connector**Application Information**

The TPIM002 is a standard single-width PIM I/O module to be used with any PIM carrier. It offers easy access to the PMC back I/O lines of PMC carrier with back I/O.

The TPIM002 distributes all PMC back I/O lines to a 68 pin SCSI-3 type connector located in the EMI front panel.

The operating temperature range is -40°C to +85°C.

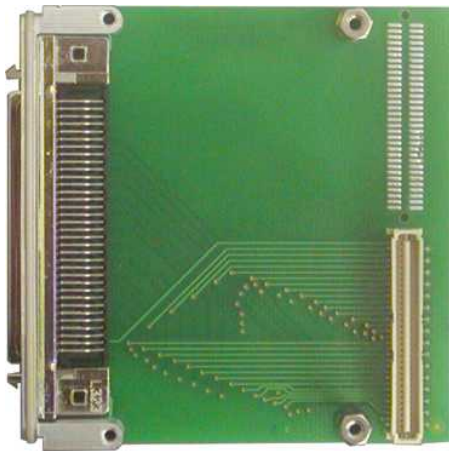
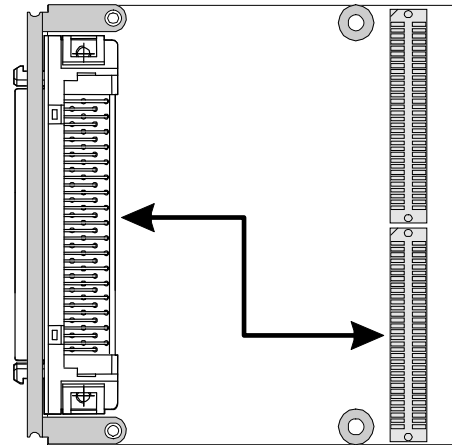


Figure: TPIM002-10

Technical Information

- Standard single-width PIM I/O Module
- Board size: 69 mm x 74 mm
- I/O lines are routed to a HD68 SCSI-3 type connector in the front panel
- EMI Front Panel
- Operating Temperature: -40°C to +85°C

**Order Information**

TPIM002-10R	PIM I/O Module with HD68 SCSI-3 type connector
TPIM002-10	None RoHS compliant version of TPIM002-10R
TPIM002-DOC	User Manual