

TPMC681 64 Digital Inputs/Outputs (Bit I/O)

Application Information

The TPMC681 is a standard single-width 32 bit PMC module offering 64 ESD-protected TTL I/Os. Each line is individually programmable as input, output or tri-state. The receivers are always enabled, which allows determining the state of each I/O line at any time. This can be used as read back function for lines configured as outputs. Each TTL I/O line has a pull-up resistor. The pull-up voltage is selectable to be either +3.3V or +5V.

Each input can generate an interrupt. Signal edge handling is programmable to interrupt on rising and/or falling edge of an input signal. Interrupts can be enabled and disabled for each bit. For interrupt source detection the status of each bit can be read from interrupt status registers.




The TPMC681 provides front panel I/O via a HD68 SCSI-3 type connector and rear panel I/O via P14.

For First Time Users the Engineering Documentation TPMC681-ED is recommended. The Engineering Documentation includes TPMC681-DOC, schematics and data sheets.

Software Support (TDRV006-SW-xx) for different operating systems is available.

Technical Information

- Standard single-width 32 bit PMC module conforming to IEEE P1386.1
- PCI 2.1 compliant interface
- 3.3V and 5V PCI Signaling Voltage
- Board size: 149 mm x 74 mm
- 64 interrupt generating digital I/O lines
 - 64 TTL I/Os
 - Direction individually programmable per line
 - TTL signaling voltage (maximum current: +/-24mA)
- ESD and overvoltage protection for each I/O line
- I/O access:
 - 64 I/O lines on HD68 front connector,
 - parallel to up to 64 I/O lines on rear connector P14 (upper 8 lines changeable to system ground)
- Temperature range: -40°C to +85°C

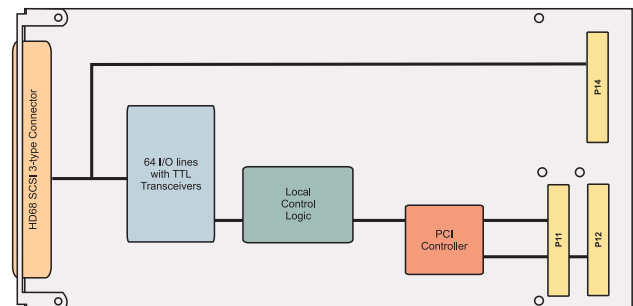

Order Information

RoHS Compliant

TPMC681-10R 64 Digital Inputs/Outputs

None RoHS Compliant

TPMC681-10 None RoHS compliant version of
TPMC681-10R

Documentation

TPMC681-DOC User Manual

TPMC681-ED Engineering Documentation, includes
TPMC681-DOC

Software

TDRV006-SW-25 Integrity Software Support

TDRV006-SW-42 VxWorks Software Support
(Legacy and VxBus-Enabled Software
Support)

TDRV006-SW-65 Windows XP/XPE/2000 Software
Support

TDRV006-SW-72 LynxOS Software Support

TDRV006-SW-82 LiNIX Software Support

TDRV006-SW-95 QNX 6 Software Support

For other operating systems please contact TEWS.

Related Products

TA304 Cable Kit for modules with HD68
SCSI-3 connector

TPIM003 PIM I/O Module with HD68 SCSI-3
type connector